
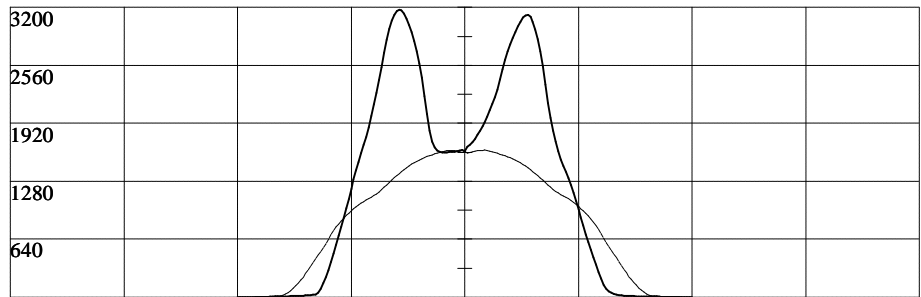


Test Report of Luminaire

Report No.:20120419DJ296

Luminaire Type	NDLE428GV 3X28W 230V		
Lamp Type	PHILIPS 865 28W		
Client	海外销售	EUT NO.	20120419DJ296
Luminaire Parameters:			
Voltage	230.0	Current	0.405
Power:	92.5	Power Factor	0.992
Frequency:	50Hz	Tc	K
Photometric Parameters			
Luminaire Flux	4774.39 lm	Luminaire Eff.	65.31%
Max Intensity	3173.826cd	Central Intensity	1609.54cd
Angle of Max Intensity:	C:180 G:26		
Upward Flux Ratio	0.0%		
Downward Flux Ratio	65.31%		
50%Imax Beam Width	C0_180[37.2 , -41.0] C90_270[13.1 , -11.3]		
Remark			
Luminaire Figure			
			

Light Distribution Curve[Unit: cd]

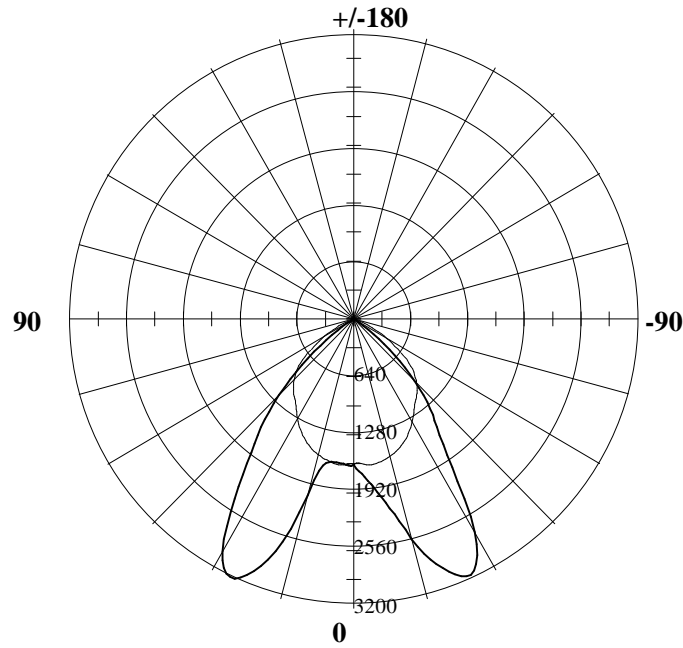


-180 Rectangular Coordinate 180

(cd)	C0_180: _____	C90_270: _____
------	---------------	----------------


NVC LIGHTING TECHNOLOGY CORPORATION

ISO-Candela V-H [Unit :cd]NDLE428GV 3X28W 230V

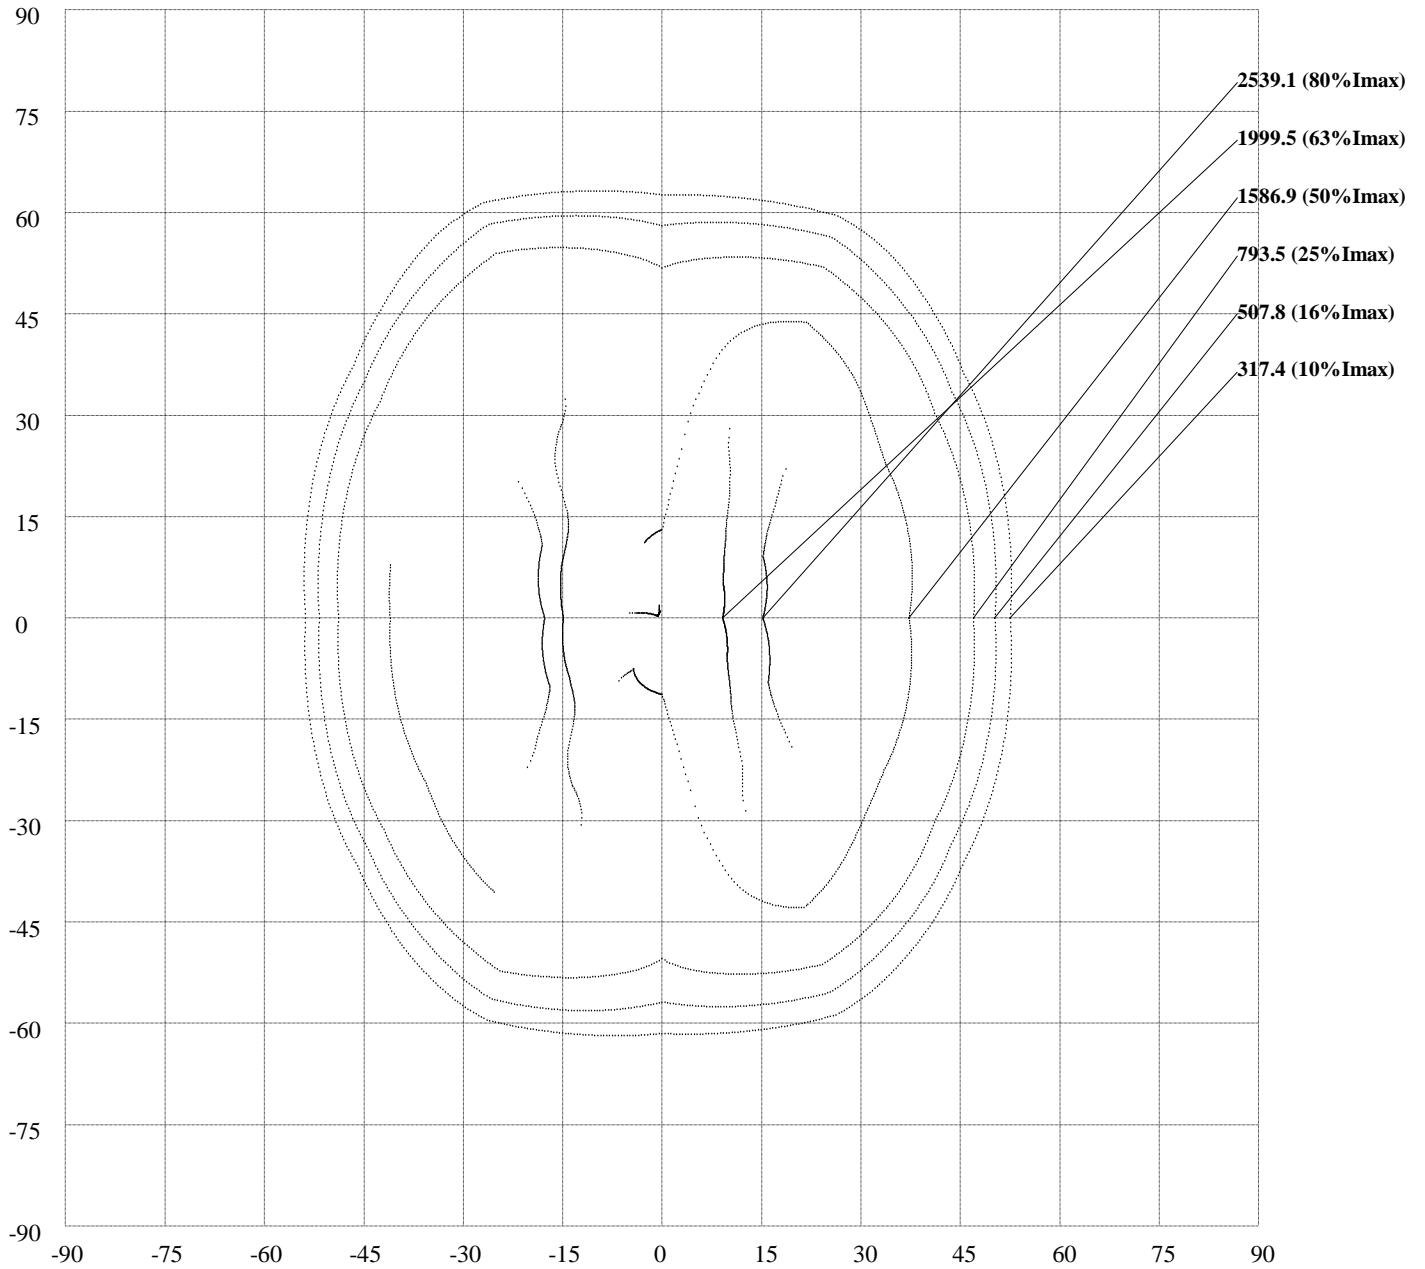

NVC LIGHTING TECHNOLOGY CORPORATION

Iso-Lux [Unit :lx]NDLE428GV 3X28W 230V

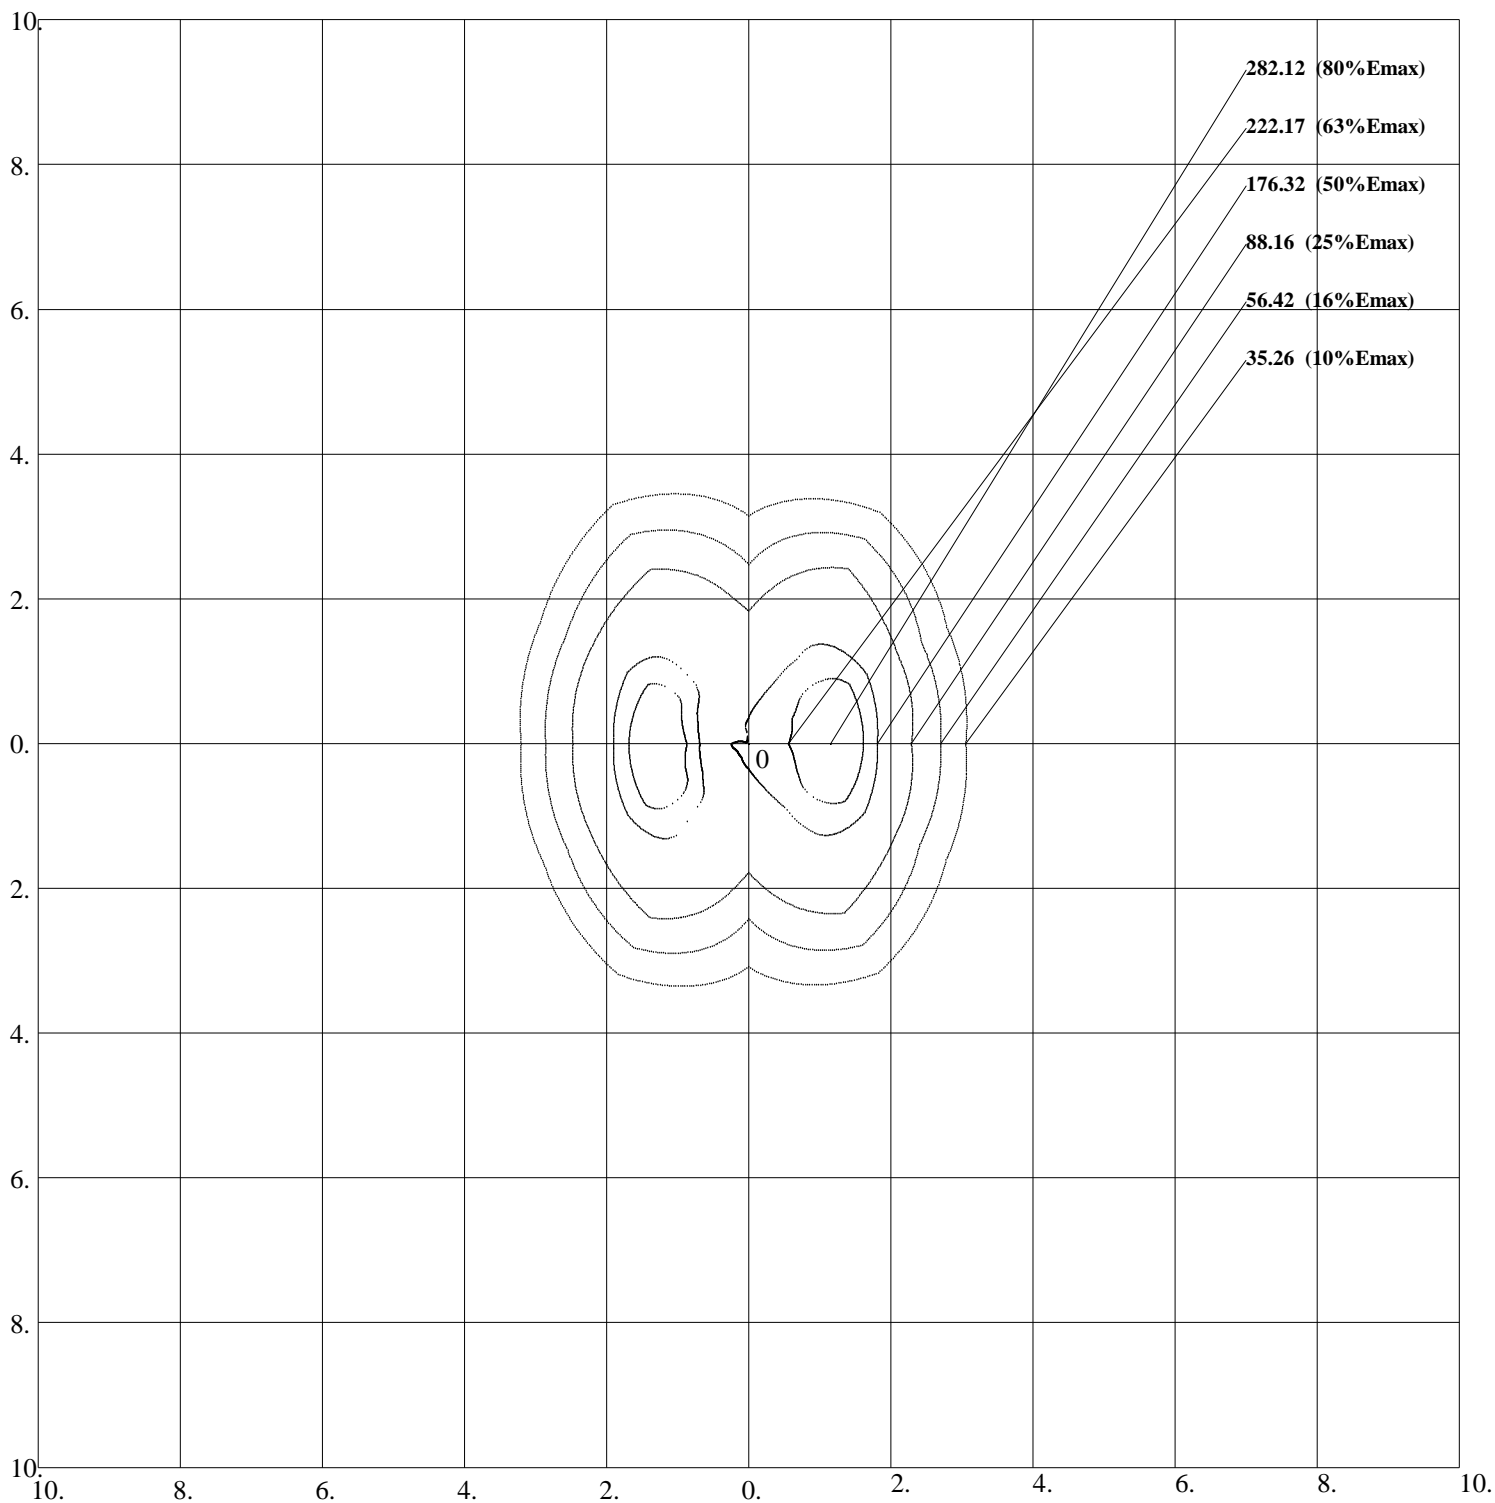

Units: lx
Height: 3 m
Max Illuminance : 352.65lx

NVC LIGHTING TECHNOLOGY CORPORATION
Lux-Distance Curve

